

# SUMOSTANCE™



## LITEWAVE™ TECHNOLOGY

Reduces ladder weight up to 15% over ordinary extension ladders



## COMPACT STORAGE

Outriggers retract to sleek storage profile



## RETRACTABLE OUTRIGGERS FOR UNMATCHED STABILITY

Adjust 9" on each side over uneven ground



## SIDE-TIP AND LEAN ANGLE INDICATORS

Built-in levels ensure level rungs and proper lean angle; work from a safe, stable setup every time

**Little Giant**  
Ladder Systems


**CLIMB ON**




Helps you set up for maximum stability on uneven ground.



Optional padded V-rung and cable hooks for utility and telecom users.

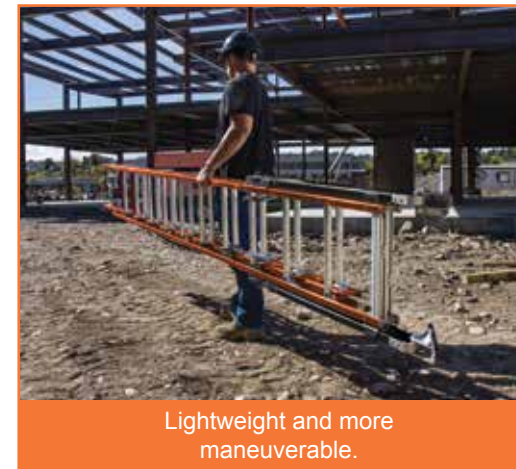

Lightweight and more maneuverable.

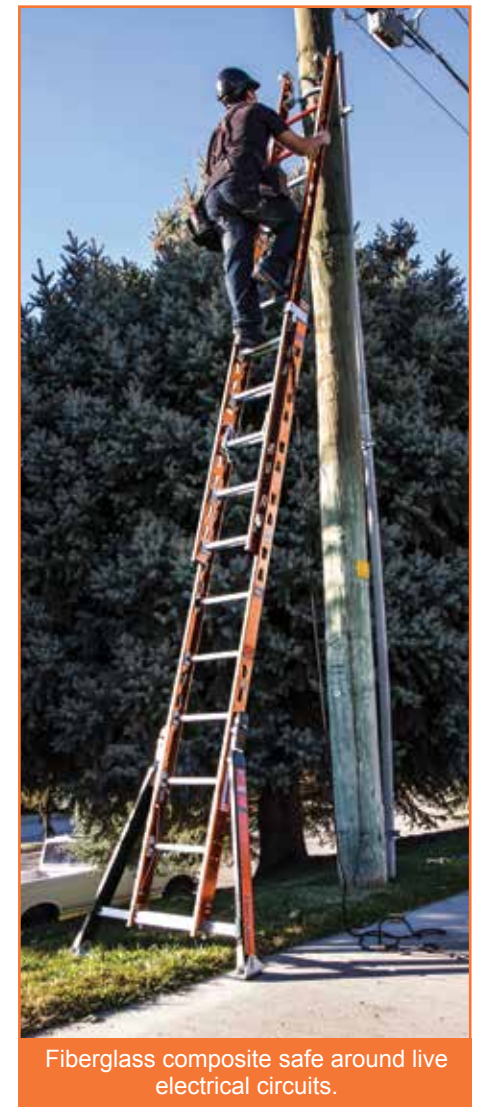

Fiberglass composite safe around live electrical circuits.

1-YEAR WARRANTY / TYPE IA 300 LBS / TYPE IAA 375 LBS

Part Number	Model	ANSI Rating	Highest Standing Level	Storage Height	Base Width	Storage Depth	Round Rung Width	D-Rung Width	Side Rail Width
15616-008	20'	Type IA - 300	13' 1"	11' 5"	22"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15606-008	24'	Type IA - 300	16' 11"	13' 5"	22"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15607-008	28'	Type IA - 300	20' 10"	15' 5"	22"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15619-008	20'	Type IAA - 375	13' 1"	11' 5"	22"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15618-008	24'	Type IAA - 375	16' 11"	13' 5"	22"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15609-008	28'	Type IAA - 375	20' 10"	15' 5"	22"	6-1/4"	1-1/4"	1-5/8"	3-5/16"
15620-008	32'	Type IAA - 375	23' 10"	17' 6"	22"	6-1/4"	1-1/4"	1-5/8"	3-5/16"

Part Number	Shoe Width	Rope Diameter	Max Base Width	Extension Max Height	Max Reach*	Fly Section Width	Total Leveling Adjustment	Leveling Increment	Weight
15616-008	3.5"	3/8"	44"	17'	19' 7"	15-3/4"	9-1/8"	3/16"	52 lbs
15606-008	3.5"	3/8"	44"	21'	23' 5"	15-3/4"	9-1/8"	3/16"	57 lbs
15607-008	3.5"	3/8"	44"	25'	27' 4"	15-3/4"	9-1/8"	3/16"	62 lbs
15619-008	3.5"	3/8"	44"	17'	19' 7"	15-3/4"	9-1/8"	3/16"	54 lbs
15618-008	3.5"	3/8"	44"	21'	23' 5"	15-3/4"	9-1/8"	3/16"	59 lbs
15609-008	3.5"	3/8"	44"	25'	27' 4"	15-3/4"	9-1/8"	3/16"	64 lbs
15620-008	3.5"	3/8"	44"	29'	30' 4"	15-3/4"	9-1/8"	3/16"	77.5 lbs

\* A 5'6" person with a 12" reach.